



SPECIFICATIONS

Type	Unit	YHE12-01	YHE12-03	YHE12-05	YHE12-09	YHE12-12
Rated Voltage	V	1.5	3	5	9	12
Operating Voltage	V	1-2	2-5	4-8	7-12	8-15
*Rated Current(MAX)	mA	20	30	30	30	30
*Min Sound Output at 10 cm	dB	75	80	85	85	85
*Resonant Frequency	Hz	2300±300				
Operating Temperature	℃	-20~+70				
Storage Temperature	℃	-30~+105				
Weight	g	2				

All multi-chip integrated circuits (SOT Plastic Package) integrated circuit using gold wire ball bonding, complex production process, long life, stable performance, high rate of qualified products.



Voltage :4 - 8VDC

Maximum current: " = 30MA/5VDC

Most whispered pressure => 85db/10cm

Resonant frequency of 2500 + - 300HZ

Operating temperature: -20 ----- 70 degrees

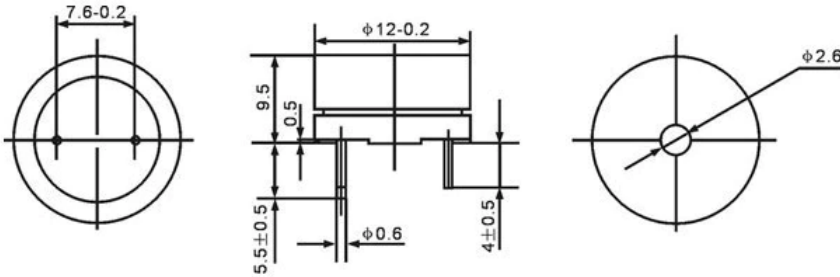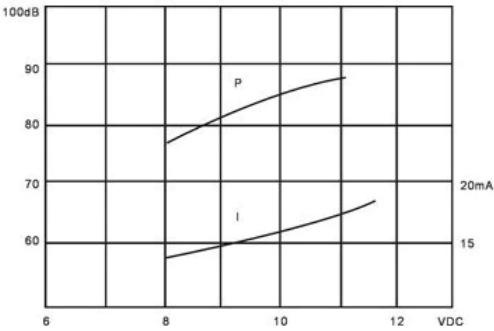



10PCS

5V Active Buzzer





